



## PORTABLE CHILLER MODEL: CH-5

230 Volt 1 Phase	
FLA	48
MCA	56
MOC	90

230 Volt 3 Phase	
FLA	33
MCA	38
MOC	58

460 Volt 3 Phase	
FLA	14
MCA	17
MOC	26

Dimensions	34"W x 61"L x 54"H
Frame	Powder Coated Steel
Housing	Stainless Steel
Tank	50 Gallon Stainless Steel
Compressor HP	5
Condenser	Air-Cooled
Glycol Pump HP	1.5
GPM @ 25 PSI	40
Connection Size	0.75" Brass Quick Connects (x5)
Heat Exchanger	Stainless Steel Brazed Plate
Controls	Single Stage Digital

Electrical Enclosure	NEMA 4
Shipping Weight	1350 lbs
Decibels @ 10'	65
Refrigerant	R404a

### Cooling Capacity by Leaving Fluid Temperature<sup>1</sup>

LFT	Btu/H	kW
20 °F	32,717	9.6
30 °F	40,850	12.0
40 °F	49,965	14.6

<sup>1</sup> All capacities at 90 °F ambient

### Portable chiller package consists of the following:

- Complete refrigeration circuit
- Air-cooled condenser
- Glycol pump
- Fluid bypass valve
- Freeze stat safety switch
- Digital temperature controller
- All insulated copper piping
- Stainless steel housing
- Powder coated steel frame
- Engineered high efficiency heat exchanger for maximum energy savings
- Insulated stainless steel glycol reservoir
- Heavy duty rubber-on-steel casters for easy portability
- Brass quick connects for cooling up to 5 tanks at once without loss of glycol
- One set of 20 ft. glycol hoses and 25 ft. power cord
- ETL (UL508) listed complete control panel with single point electrical connection, breakers, starters & safety switches
- Louvered stainless steel access panels for easy service & maintenance
- Factory run tested and fully charged with refrigerant

**1 Year Parts and Labor Warranty**

8

7

6

5

4

3

2

1

F

E

D

C

B

A

F

E

D

C



B

A



<<<<<< AIR FLOW <<<<<<

<<<<<< AIR FLOW <<<<<<

24.0 MINIMUM CLEARANCE

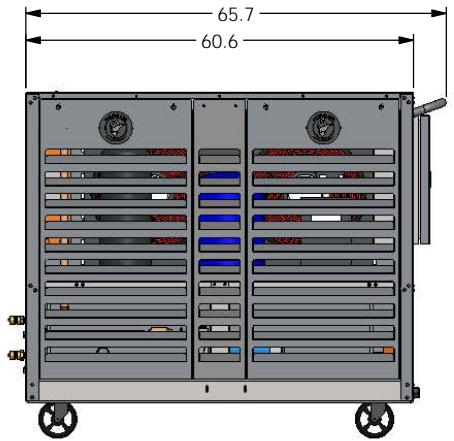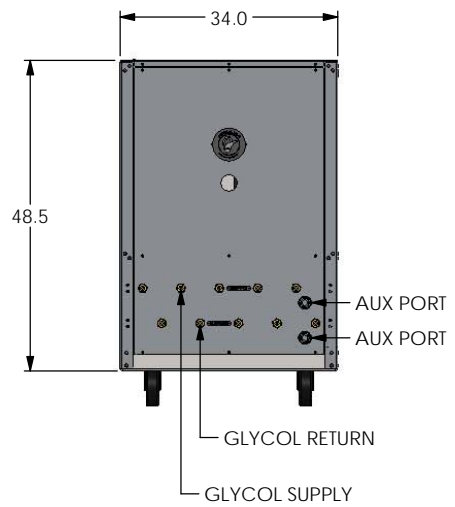

CONTROL PANEL

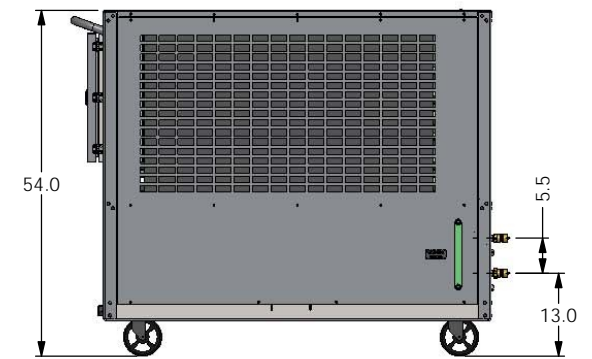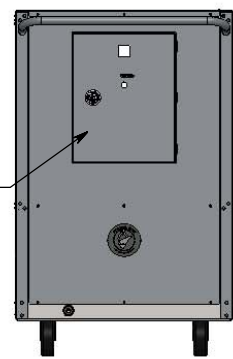

# CH-5

## PORTABLE CHILLER



**G&D CHILLERS**

COMMITTED TO COLD

EST 1993

760 BAILEY HILL ROAD EUGENE, OR 97402 · TEL (541) 345-3903 (800) 555-0973

8 7 6 5 4 3 2 1