



CHILLER MODEL: GD-10H-MS

230 Volt 1 Phase	
FLA	-
MCA	-
MOC	-

230 Volt 3 Phase	
FLA	59
MCA	68
MOC	102

460 Volt 3 Phase	
FLA	30
MCA	34
MOC	51

Dimensions ¹	48"W x 108"L x 73"H
Frame	Powder Coated Steel
Housing	Powder Coated Aluminum
Tank	230 Gallon with Aux Ports
Compressor HP	10
Condenser	Air-Cooled
Process Pump HP	5
GPM @ 25 PSI	150
Connection Size	2" CTS Flange
Chiller Pump HP	1.5
Heat Exchanger	Stainless Steel Brazed Plate
Controls	Multi Stage Digital

Electrical Enclosure	NEMA 3R
Shipping Weight	1700 lbs
Decibels @ 10'	69
Refrigerant	R404a

Cooling Capacity by Leaving Fluid Temperature ²

LFT	Btu/H	kW
20 °F	64,218	18.8
30 °F	79,372	23.3
40 °F	96,495	28.3

¹ Dimensions accurate for package chiller, remote condenser options will vary







² All capacities at 90 °F ambient

³ VFD available upon request

Modular chiller package consists of the following:

- Complete refrigeration circuits
- Air-cooled condenser
- Process pump³
- Chiller pump
- Fluid bypass valve
- Freeze stat safety switch
- All insulated copper piping
- Powder coated steel frame
- Powder coated aluminum housing
- Engineered high efficiency heat exchanger for maximum energy savings
- Insulated oversized glycol reservoir with auxilliary ports for future chiller modules
- Digital temperature controller pre-wired for integration into expanding system
- ETL (UL508) listed complete control panel with single point electrical connection breakers, starters & safety switches
- CTS flange glycol supply and return connections
- Louvered aluminum access panels for easy service & maintenance
- Factory run tested and fully charged with refrigerant

2 Year Parts and 1 Year Labor Warranty

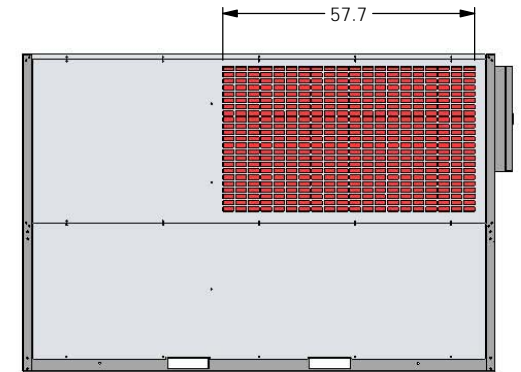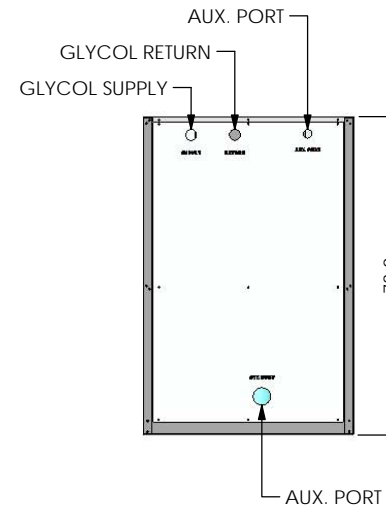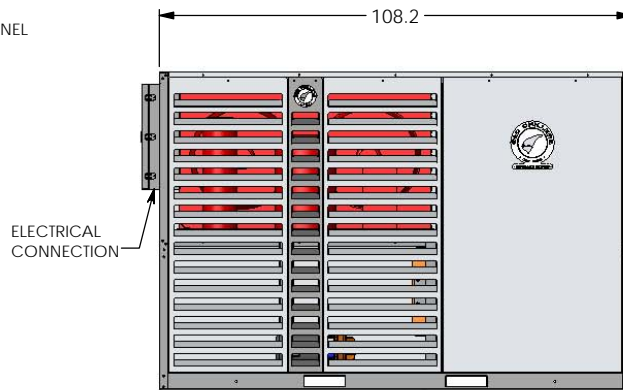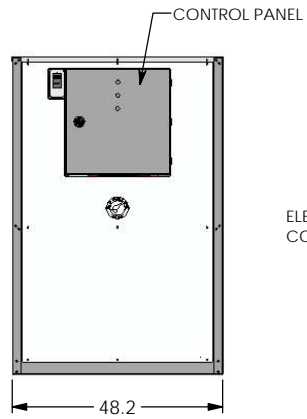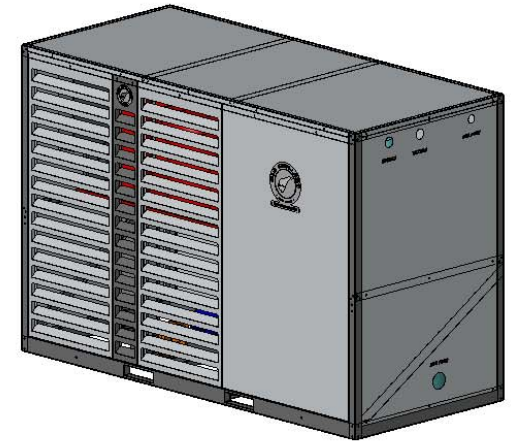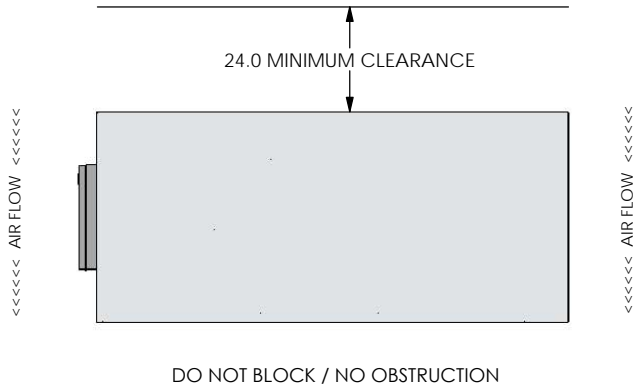

GD-10/13.5H-MS STATIONARY CHILLER



G&D CHILLERS

COMMITTED TO COLD

◦ EST 1993 ◦

3498 WEST FIRST, SUITE 1 EUGENE, OR 97402 - TEL (541) 345-3903 (800) 555-0973