

CHILLER MODEL: GD-100H-2C

208-240V 1-Phase		
FLA	-	
MCA	-	
мос	-	

208-240V 3-Phase		
FLA	446	
MCA	494	
MOC	686	

460-480V 3-Phase		
FLA	222	
MCA	246	
MOC	342	

Dimensions ¹	91"W x 167"L x 108"H	
Frame	Powder Coated Steel	
Housing	Powder Coated Aluminum	
Tank	700 Gallon Stainless Steel	
Compressor	50 HP (x2)	
Condenser	Air-Cooled Vertical Discharge	
Process Pump	7.5 HP	
Process Flow	230 GPM @ 25 PSI	
Connection	3" CTS Flange	
Chiller Pump	5 HP	
Heat Exchanger	Stainless Steel Brazed Plate	
Controls	Microprocessor w/ Comm.	

Electrical Enclosure	NEMA 3R	
Ship/Operating Weight	8700/14800 lbs	
Decibels @ 10'	80 dBA	
Refrigerant	R448A	

Cooling Capacity by Leaving Fluid Temperature²


LFT	Btu/H	kW
20 °F	631,000	184.9
30 °F	774,000	226.8
40 °F	936,000	274.3

Package chiller dimensions, remote condenser options will vary
All capacities at 90°F ambient
Specifications subject to change without notice

Chiller package consists of the following:


- Two complete refrigeration circuits
- Air-cooled condenser
- Process pump with VFD
- Chiller pump
- Fluid bypass valve
- Freeze stat safety switch
- All insulated copper piping
- Powder coated steel frame
- Powder coated aluminum housing


- Semi-hermetic reciprocating compressors with capacity unloading
- Engineered high efficiency heat exchanger for maximum energy savings
- Insulated stainless steel glycol reservoir with baffle plate
- Microprocessor controller with communication
- ETL (UL 508A) listed complete control panel with single point electrical connection, breakers, starters & safety switches
- CTS flange glycol supply and return connections
- Louvered aluminum access panels for easy service & maintenance
- Factory run tested and fully charged with refrigerant

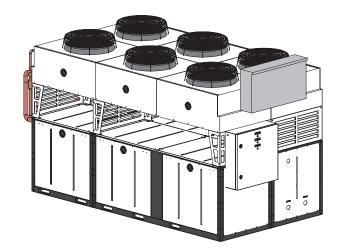

COMMITTED TO COLD 130 E FIRST AVE., JUNCTION CITY, OR 97448 TEL: (541) 345-3903 (800) 555-0973

D

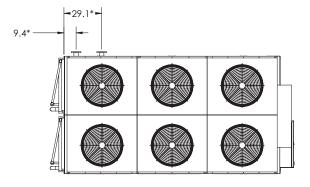

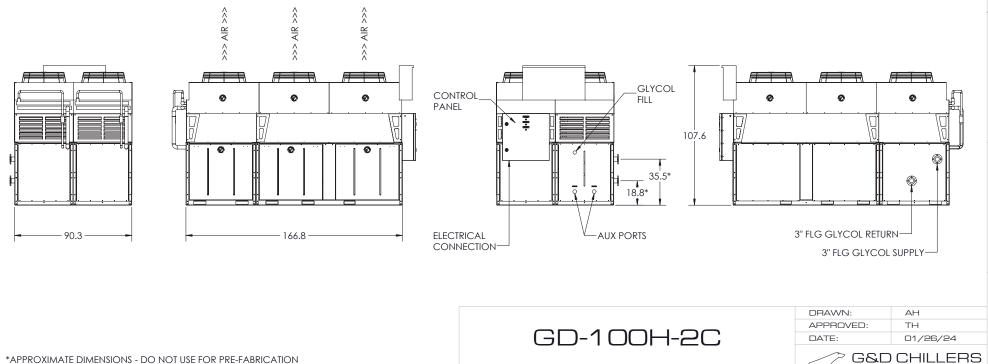

*APPROXIMATE DIMENSIONS - DO NOT USE FOR PRE-FABRICATION OF CONNECTING PIPING

D

С

Α

VERTICAL AIR CHILLER