

FIRE & ICE MODEL: CH-3/25

230 Volt 1 Phase	
FLA	1
MCA	-
MOC	1

230 Volt 3 Phase	
FLA	-
MCA	-
МОС	-

460 Volt	460 Volt 3 Phase	
FLA	34	
MCA	43	
МОС	45	

Dimensions	32"W x 52"L x 45"H	
Frame	Powder Coated Steel	
Housing	Stainless Steel	
Tank	30 Gallon Stainless Steel	
Compressor	3 HP	
Condenser	Air-Cooled	
Glycol Pump	1.5 HP	
Process Flow	40 GPM @ 25 PSI	
Connection Size	0.75" Brass Quick Connects (x4)	
Heat Exchanger	Stainless Steel Brazed Plate	
Controls	Single Stage Digital	


Heating Element	25 kW
Electrical Enclosure	NEMA 3R
Ship/Operating Weight	750/1000 lbs
Decibels @ 10'	62 dBA
Refrigerant	R448A
Cooling Capacity ¹	21,800 Btu/h
Heating Capacity	85,300 Btu/h

- 1. Capacity with 30 °F glycol LFT in 90 °F ambient
- 2. Specifications subject to change without notice


Fire & Ice package consists of the following:


- Complete refrigeration circuit
- Air-cooled condenser
- Glycol pump
- Fluid bypass valve
- Freeze stat safety switch
- Digital temperature controller
- All insulated copper piping
- Stainless steel housing
- Powder coated steel frame
- Insulated stainless steel glycol reservoir


- Low watt density heating element specifically designed for glycol
- Engineered high efficiency heat exchanger for maximum energy savings
- Heavy duty rubber-on-steel casters for easy portability
- Brass quick connects for temperature control of up to 4 tanks at once without loss of glycol
- Complete set of 20 ft. glycol hoses and 25 ft. power cord
- ETL (UL508) listed complete control panel with single point electrical connection, breakers, starters & safety switches
- Louvered stainless steel access panels for easy service & maintenance
- Factory run tested and fully charged with refrigerant

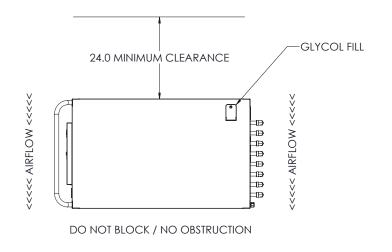












FIRE & ICE
PORTABLE CHILLER & HEATER

	DRAWN:	AH		
	APPROVED:	TH		
	REVISION DATE:	05/11/23		



G&D CHILLERS COMMITTED TO COLD

130 E FIRST AVE, JUNCTION CITY, OR 97448 TEL: (541) 345-3903 (800) 555-0973