



## CHILLER MODEL: **GD-10H-1LC-HA**

208-240V 1-Phase	
FLA	-
MCA	-
MOC	-

208-240V 3-Phase	
FLA	53
MCA	65
MOC	108

460-480V 3-Phase	
FLA	27
MCA	32
MOC	54

Dimensions <sup>1</sup>	48"W x 97"L x 61"H
Frame	Powder Coated Steel
Housing	Powder Coated Aluminum
Tank	30 Gallon Stainless Steel
Compressor	10 HP Two-Stage Recip
Condenser	Air-Cooled Vertical Discharge
Coolant Pump	High Efficient Mag. Drive
Flow rate	12.7 GPM @ 25 PSI
Connection	1" CTS Flange
Heat Exchanger	Stainless Steel Brazed Plate
Controls	Microprocessor w/ Comm.
Enclosure	NEMA 3R

Ship/Operating Weight	2000/2400 lbs
Decibels @ 10'	70 dBA
Refrigerant	R404A

### *Cooling Capacity by Leaving Fluid Temperature<sup>2</sup>*

LFT	Btu/H	kW
-60 °F	17,400	5.1
-	-	-
-	-	-

1. Package chiller dimensions, remote condenser options will vary






2. All capacities at 90°F ambient

3. Specifications subject to change without notice

### *Chiller package consists of the following:*

- Complete refrigeration circuit
- Air-cooled condenser
- Coolant pump
- Fluid bypass valve
- Freeze stat safety switch
- CTS flange coolant connections
- All insulated copper piping
- Powder coated steel frame
- Powder coated aluminum housing
- Semi-hermetic two-stage reciprocating compressor with subcooler
- Engineered high efficiency heat exchanger for maximum energy savings
- Heavily insulated stainless steel coolant reservoir
- Microprocessor controller with communication capabilities
- ETL (UL 508A) listed complete control panel with single point electrical connection, breakers, starters & safety switches
- Louvered aluminum access panels for easy service & maintenance
- Factory run tested and fully charged with refrigerant

**2 Year Parts and 1 Year Labor Warranty**

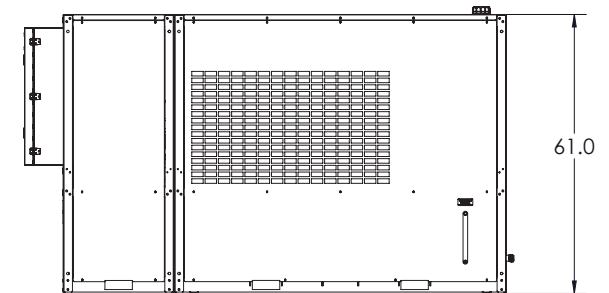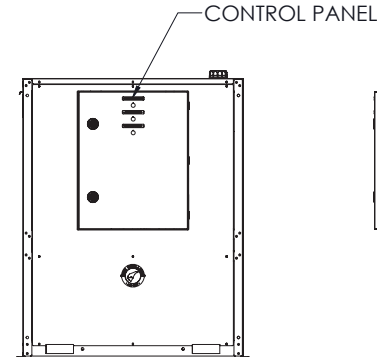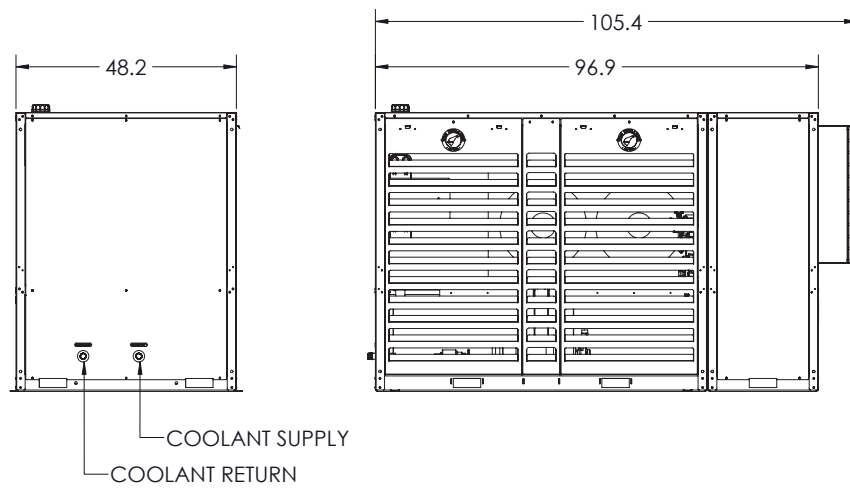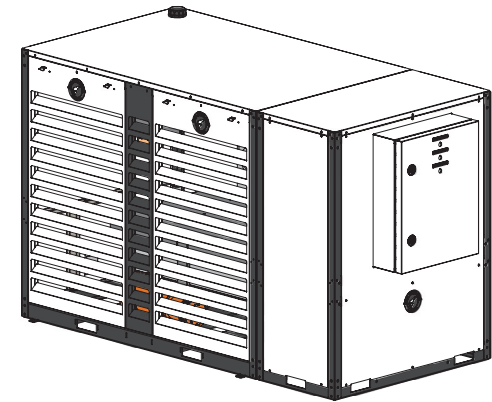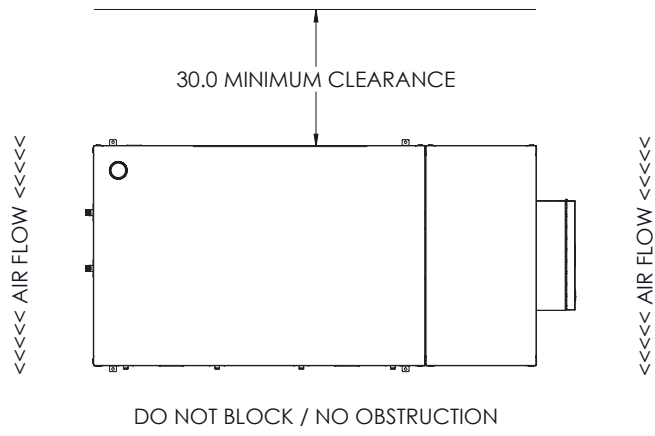

\*APPROXIMATE DIMENSIONS - DO NOT USE FOR PRE-FABRICATION OF CONNECTING PIPING

# GD-10H-1LC-HA STATIONARY CHILLER

DRAWN:	DS
APPROVED:	TH
DATE:	03/04/25



**G&D CHILLERS**  
COMMITTED TO COLD

130 E FIRST AVE, JUNCTION CITY, OR 97448  
TEL: (541) 345-3903 (800) 555-0973