

CHILLER MODEL: GD-120T-4HE

208-240V 1-Phase		
FLA	-	
MCA	-	
мос	-	

208-240V 3-Phase		
FLA	-	
MCA	-	
мос	-	

460-480V 3-Phase		
FLA	257	
МСА	271	
мос	327	

Dimensions ¹	91"W x 274"L x 113"H	
Frame	Powder Coated Steel	
Housing	Powder Coated Aluminum	
Tank	930 Gallon Stainless Steel	
Compressor	Tandem Scroll (x2)	
Condenser	Air-Cooled Vertical Discharge	
Process Pump	10 HP	
Process Flow	340 GPM @ 25 PSI	
Connection	4" CTS Flange	
Chiller Pump	5 HP	
Heat Exchanger	Stainless Steel Brazed Plate	
Controls	Microprocessor w/ Comm.	

Electrical Enclosure	NEMA 3R	
Ship/Operating Weight	13,000/21,000 lbs	
Decibels @ 10'	82 dBA	
Refrigerant	R410A	

Cooling Capacity by Leaving Fluid Temperatur


LFT	Btu/H	kW
40 °F	1,254,000	367.5
50 °F	1,498,000	439.0
60 °F	1,771,000	519.0

Package chiller dimensions, remote condenser options will vary
All capacities at 90°F ambient
Specifications subject to change without notice

Chiller package consists of the following:

- Two complete refrigeration circuits
- Air-cooled condenser
- Process pump with VFD
- Chiller pump
- Fluid bypass valve
- Freeze stat safety switch
- All insulated copper piping
- Powder coated steel frame
- Powder coated aluminum housing

- Two sets of tandem compressors optimize efficiency & load balancing
- Engineered high efficiency heat exchanger for maximum energy savings
- Insulated stainless steel glycol reservoir with baffle plate
- Microprocessor controller with communication capabilities
- ETL (UL 508A) listed complete control panel with single point electrical connection, breakers, starters & safety switches
- CTS flange glycol supply & return connections
- Louvered aluminum access panels for easy service & maintenance
- Factory run tested and fully charged with refrigerant

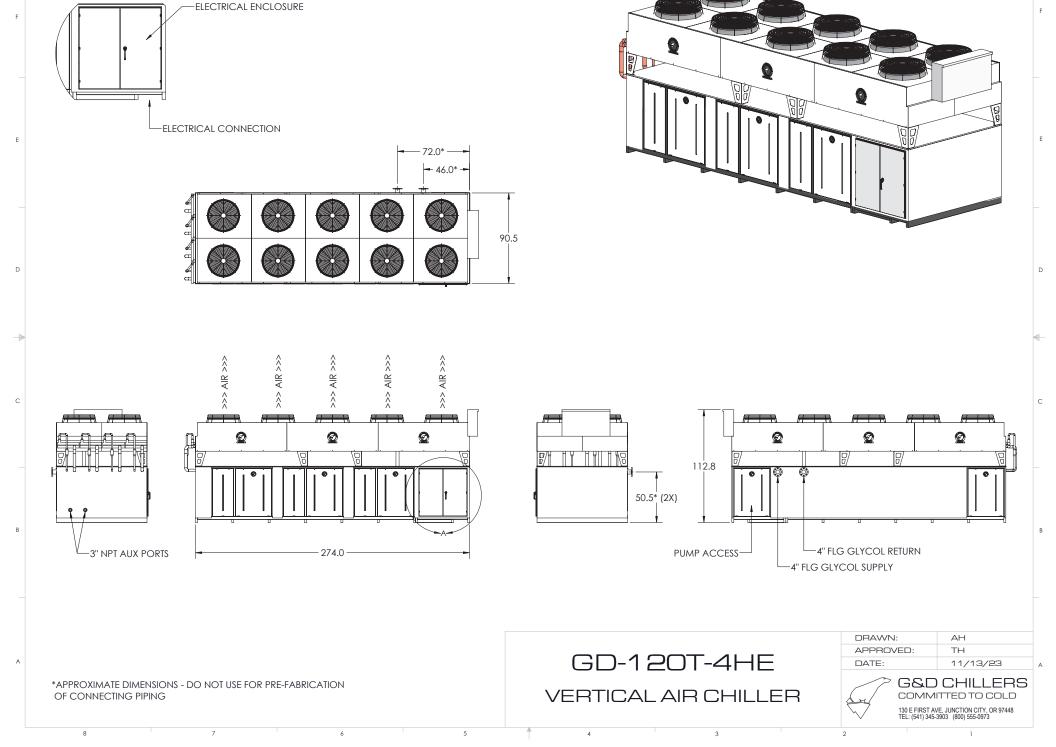

DETAIL A