

## CHILLER MODEL: GD-14H-2LC-VA2

230 Volt 1 Phase		
FLA	-	
MCA	-	
мос	-	

230 Volt 3 Phase		
FLA	84	
MCA	93	
мос	128	

460 Volt 3 Phase		
FLA	43	
MCA	47	
мос	65	

Dimensions <sup>1</sup>	45"W x 140"L x 108"H	
Frame	Powder Coated Steel	
Housing	Powder Coated Aluminum	
Tank	50 Gallon Stainless Steel	
Compressor	7 HP Two-Stage Recip (x2)	
Condenser	Air-Cooled Vertical Discharge	
Coolant Pump	High Efficient Mag. Drive	
Flow rate	17 GPM @ 25 PSI	
Connection	1" CTS Flange	
Heat Exchanger	Stainless Steel Brazed Plate	
Controls	Microprocessor w/ Comm.	
Enclosure	NEMA 3R	

Ship/Operating Weight	3000/3500 lbs	
Decibels @ 10'	75 dBA	
Refrigerant	R404A	

## Cooling Capacity by Leaving Fluid Temperature<sup>2</sup>

LFT	Btu/H	kW
-60 °F	22,600	6.6
-	-	-
-	-	-


Package chiller dimensions, remote condenser options will vary
All capacities at 90°F ambient

3. Specifications subject to change without notice

## Chiller package consists of the following:

- Two complete refrigerations circuit
- Air-cooled condenser
- Coolant pump
- Fluid bypass valve
- Freeze stat safety switch
- CTS flange coolant connections
- All insulated copper piping
- Powder coated steel frame
- Powder coated aluminum housing

- Semi-hermetic two-stage reciprocating compressors with subcoolers
- Engineered high efficiency heat exchanger for maximum energy savings
- Heavily insulated stainless steel coolant reservoir
- Microprocessor controller with communication capabilities
- ETL (UL 508A) listed complete control panel with single point electrical connection, breakers, starters & safety switches
- Louvered aluminum access panels for easy service & maintenance
- Factory run tested and fully charged with refrigerant

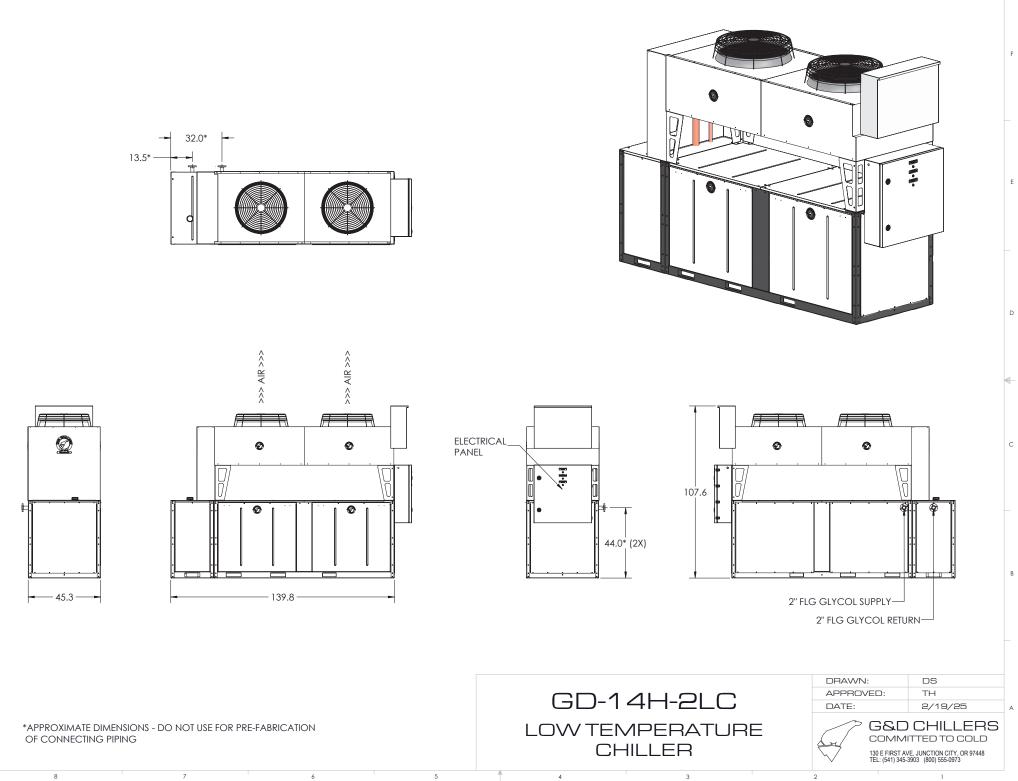

D

C

А