



CHILLER MODEL: GD-20H

208-240V 1-Phase	
FLA	-
MCA	-
MOC	-

208-240V 3-Phase	
FLA	97
MCA	106
MOC	140

460-480V 3-Phase	
FLA	52
MCA	55
MOC	72

Dimensions ¹	48"W x 120"L x 87"H
Frame	Powder Coated Steel
Housing	Powder Coated Aluminum
Tank	230 Gallon Crosslinked Poly (PEX)
Compressor	10 HP (x2)
Condenser	Air-Cooled Microchannel
Process Pump	5 HP
Process Flow	150 GPM @ 25 PSI
Connection	2" CTS Flange
Chiller Pump	1.5 HP
Heat Exchanger	Stainless Steel Brazed Plate
Controls	Microprocessor w/ Comm.

Electrical Enclosure	NEMA 3R
Ship/Operating Weight	2450/4450 lbs
Decibels @ 10'	68 dBA
Refrigerant	R448A

Cooling Capacity by Leaving Fluid Temperature²

LFT	Btu/H	kW
20 °F	128,000	37.5
30 °F	160,000	46.9
40 °F	196,000	57.4

1. Package chiller dimensions, remote condenser options will vary

2. All capacities at 90°F ambient







3. VFD available upon request

4. Specifications subject to change without notice

Chiller package consists of the following:


- Two complete refrigeration circuits
- Air-cooled microchannel condenser
- Process pump³
- Chiller pump
- Fluid bypass valve
- Freeze stat safety switch
- All insulated copper piping
- Powder coated steel frame
- Powder coated aluminum housing
- Engineered high efficiency heat exchanger for maximum energy savings
- Insulated crosslinked polyethylene (PEX) glycol reservoir
- Microprocessor controller with communication capabilities
- Electronic expansion valves for precise superheat control
- ETL (UL 508A) listed complete control panel with single point electrical connection, breakers, starters & safety switches
- CTS flange glycol supply and return connections
- Louvered aluminum access panels for easy service & maintenance
- Factory run tested and fully charged with refrigerant

2 Year Parts and 1 Year Labor Warranty

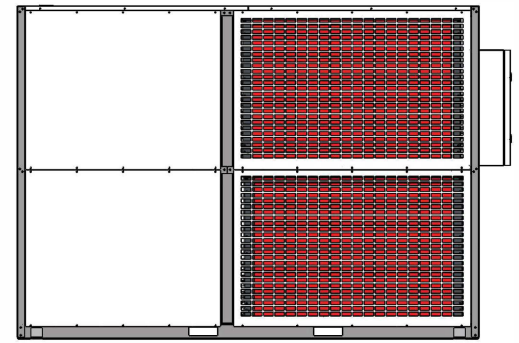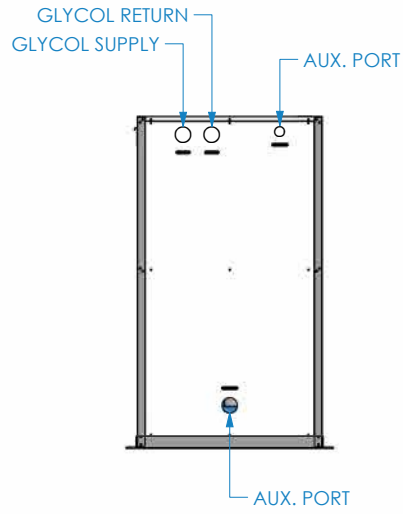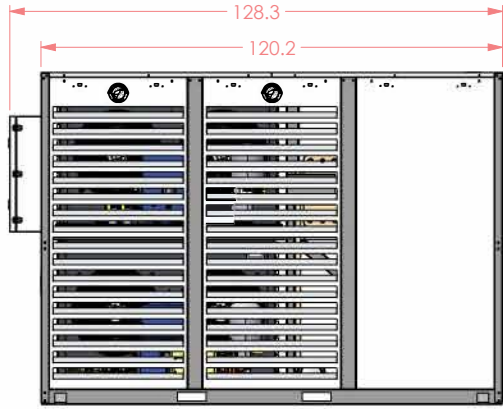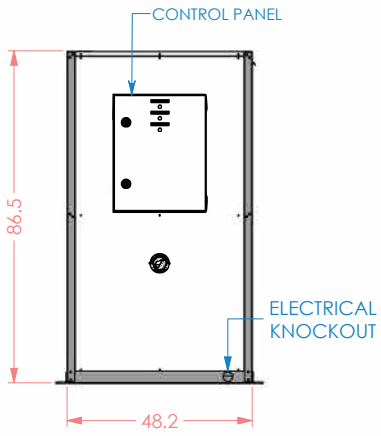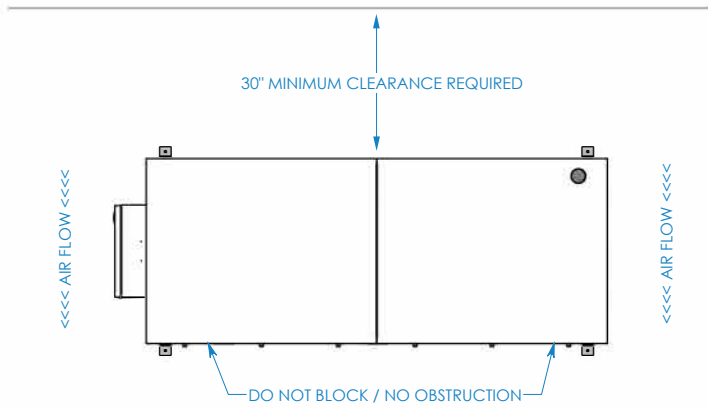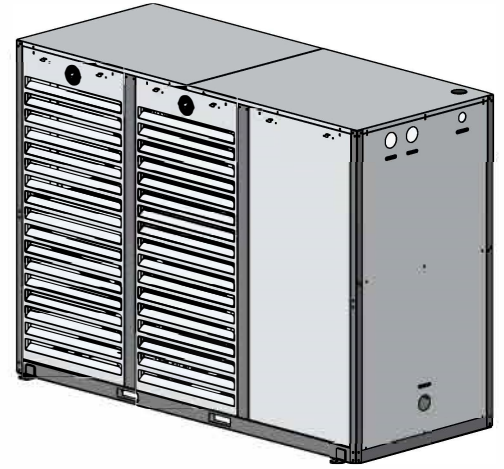

GD-20H/27H

STATIONARY CHILLER

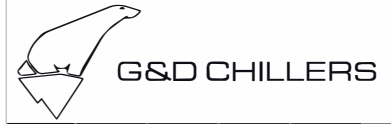

COMMITTED TO COLD
 ○ EST 1993 ○

760 BAILEY HILL ROAD EUGENE, OR 97402 - TEL (541) 345-3803 (800) 555-0973