



CHILLER MODEL: GD-35H-1C

208-240V 1-Phase	
FLA	-
MCA	-
MOC	-

208-240V 3-Phase	
FLA	152
MCA	182
MOC	300

460-480V 3-Phase	
FLA	78
MCA	94
MOC	150

Dimensions ¹	45"W x 167"L x 108"H
Frame & Housing	Powder Coated Steel
Tank	235 Gallon Stainless Steel
Compressor	35 HP
Condenser	Air-Cooled Vertical Discharge
Process Pump	5 HP
Process Flow	150 GPM @ 25 PSI
Connection	3" CTS Flange
Chiller Pump	1.5 HP
Heat Exchanger	Stainless Steel Brazed Plate
Controls	Microprocessor w/ Comm.

Electrical Enclosure	NEMA 3R
Ship/Operating Weight	3750/5850 lbs
Decibels @ 10'	75 dBA
Refrigerant	R454C

Cooling Capacity by Leaving Fluid Temperature²

LFT	Btu/H	kW
20 °F	173,900	51.0
30 °F	223,300	65.4
40 °F	280,900	82.3






1. Package chiller dimensions, remote condenser options will vary

2. Capacity based on a 10°F temperature difference and 90°F ambient temperature at 0' ASL

3. Specifications subject to change without notice

Chiller package consists of the following:

- Complete refrigeration circuit
- Air-cooled condenser
- Process pump with VFD
- Chiller pump
- Fluid bypass valve
- All insulated copper piping
- ASME B16.5 flange connections
- Powder coated steel frame and housing
- Semi-hermetic reciprocating compressor with capacity unloading
- Engineered high efficiency heat exchanger for maximum energy savings
- Insulated stainless steel glycol reservoir with baffle plate
- Microprocessor controller with communication capabilities
- ETL (UL 508A) listed complete control panel with single point electrical connection, breakers, starters & safety switches
- Removable access panels for easy service & maintenance
- Factory run tested and fully charged with refrigerant

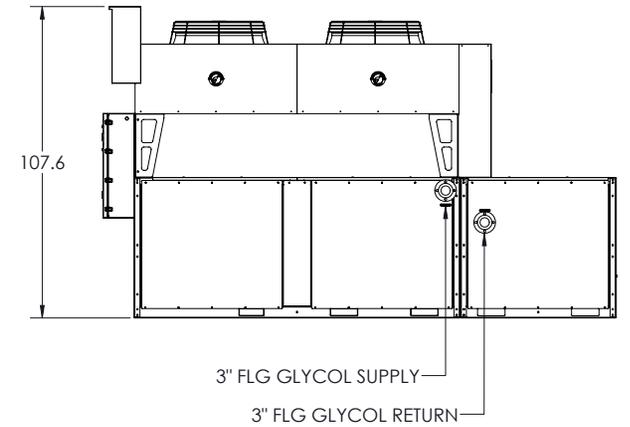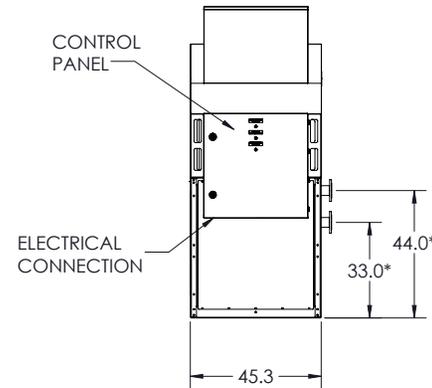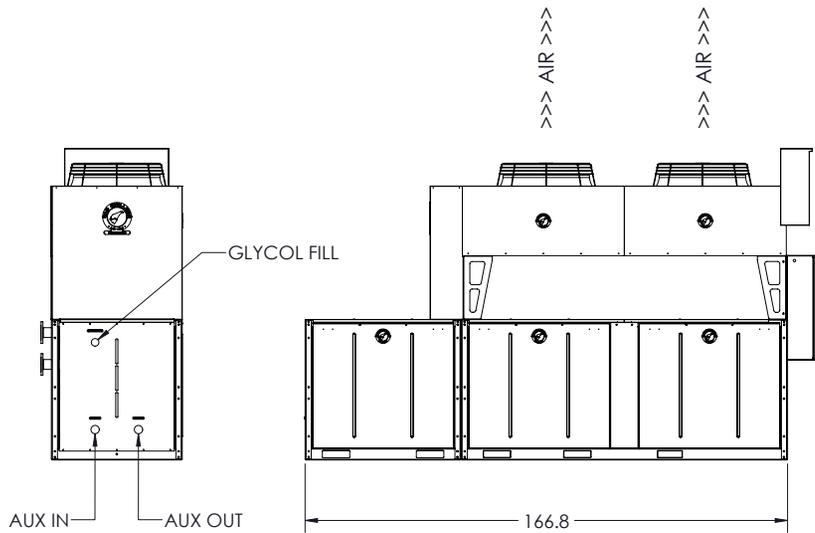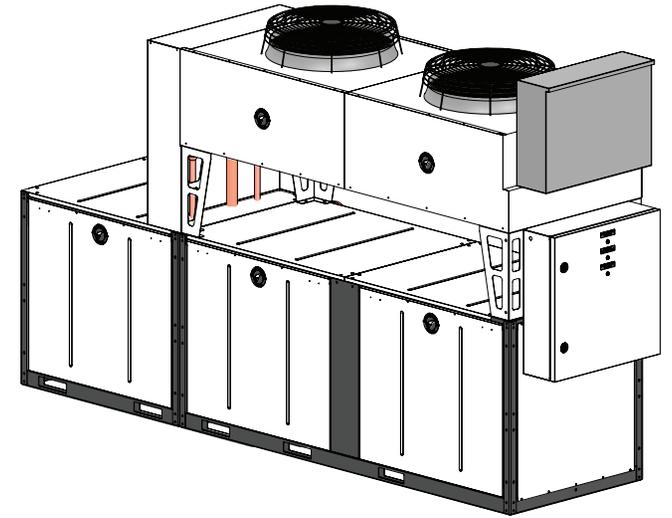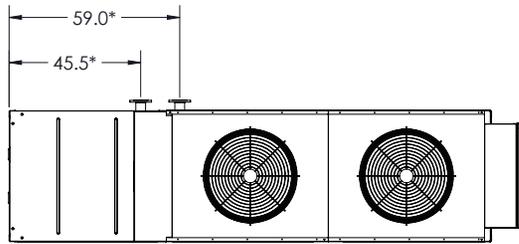

*APPROXIMATE DIMENSIONS - DO NOT USE FOR PRE-FABRICATION OF CONNECTING PIPING

GD-35H-1C

VERTICAL AIR CHILLER

DRAWN:	AH
APPROVED:	TH
DATE:	02/01/24



G&D CHILLERS
COMMITTED TO COLD

130 E FIRST AVE, JUNCTION CITY, OR 97448
TEL: (541) 345-3903 (800) 555-0973