



CHILLER MODEL: **GD-0015TFLN**

Dimensions ¹	28" W x 26" L x 27" T
Frame	Powder Coated Steel
Housing	Powder Coated Steel
Tank	10 gal
Compressor	1.5 T x 1
Condenser	Air Cooled Microchannel
Pump	1.2 HP
Process Flow	4 GPM
Connection	1/2" NPT
Heat Exchanger	Stainless Steel Brazed Plate
Controls	Microprocessor w/ Comm.
IP Rating	IP40
Weight (lbs)	210
Decibels @ 30'	46
Refrigerant	R513A

230V 1-Phase	
Total Absorbed Current (A)	12.09
Max Absorbed Current (A)	15.05
Starting Current (A)	69

Cooling Capacity @ 90°F Ambient






Temp In	Temp Out	BTU/hr
70°F	60°F	18,000
60°F	50°F	15,000
50°F	40°F	13,000

1. Package chiller dimensions, remote condenser options will vary

2. Specifications subject to change without notice

Chiller package consists of the following:

- One complete refrigeration circuit
- Air-cooled microchannel condenser
- Circulation pump
- Fluid bypass valve
- Freeze stat safety switch
- All insulated copper piping
- Powder coated steel frame
- Powder coated steel housing
- Rotary compressor
- Engineered high efficiency heat exchanger for maximum energy savings
- Insulated plastic glycol reservoir
- Microprocessor controller with communication
- ETL (UL 508A) listed complete control panel with single point electrical connection, breakers, starters & safety switches
- NPT flange glycol supply and return connections
- Access panels for easy service & maintenance
- Factory run tested and fully charged with refrigerant

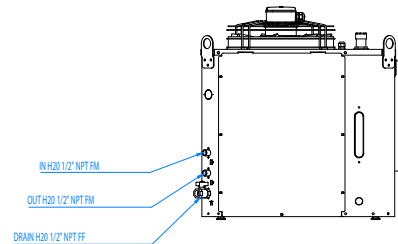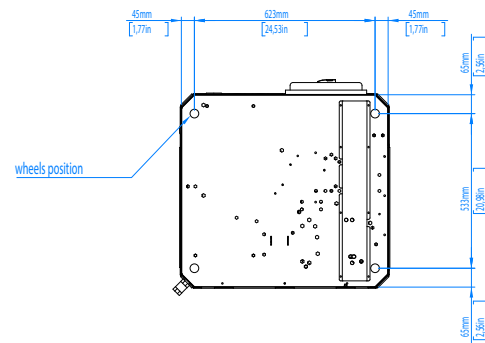

Models:
GD-0007TFLN
GD-0015TFLN

UNLESS OTHERWISE SPECIFIED:			NAME		DATE		CHILLER TYPE, AIRFLOW RATE, AND TONNAGE CAPACITY OF EACH CHILLER TO BE PROVIDED. AIRFLOW DIRECTION AND OTHER ACCESSORIES ARE PROPERTY OF	
DIMENSIONS ARE IN INCHES/CM			DOWN BY		---		 G&D CHILLERS <small>© 2000 G&D CHILLERS, INC. DIMENSIONS IN INCHES</small>	
SURFACE FINISH			ENG BY		---			
TOL.			CHK BY		---			
AP			APP BY		---			
REL BY			---		---			
SCALE: 1"=1'-0"			MAT NO.		---		CHILLER ID-0007/0015TFLN	
SCALE: 1"=1'-0"			---		---		ID NO. GA04G&D-0002	